

**HIGH-PERFORMANCE  
FAST CAMERAS**

**TELOPS**  
EXOSENS GROUP

# FAST M200hd



*HIGH-SPEED VGA-FORMAT  
SCIENTIFIC THERMAL IMAGING*

## KEY FEATURES



**HIGH FRAME RATE**



**HIGH-SPEED INTERNAL MEMORY**



**HIGH SENSITIVITY**




**ADVANCED CALIBRATION**


The M200hd is a cooled, high-performance scientific thermal infrared camera designed to provide excellent image quality and impressive thermal sensitivity. It features our unique real-time calibration and is an excellent choice for a variety of scientific and industrial applications.



# FAST M200hd

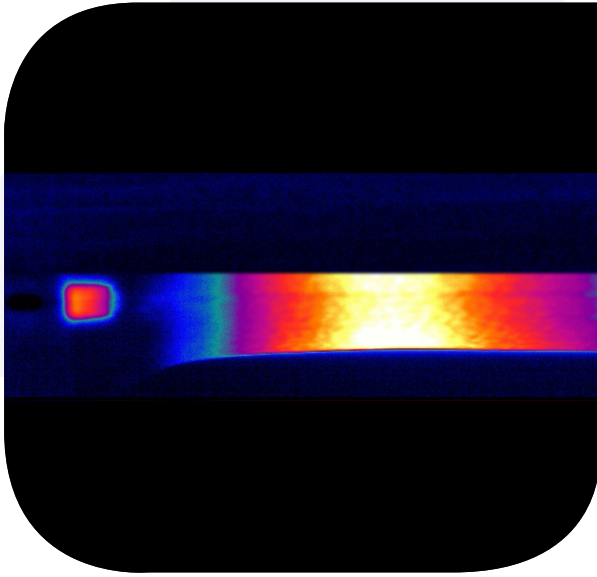

Experimental Mechanics

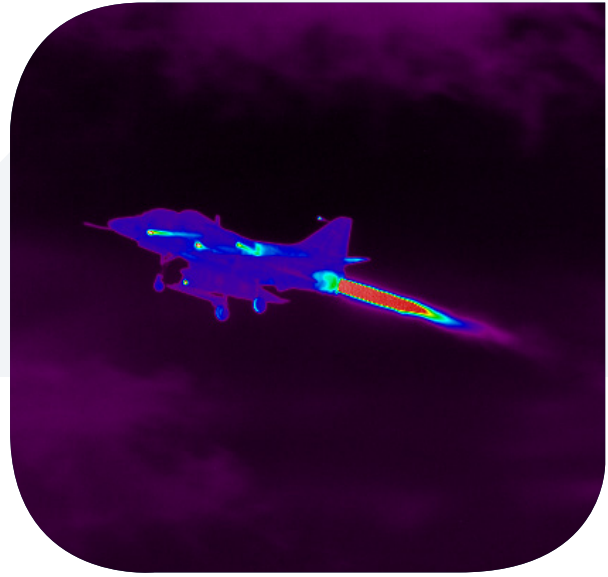

Target Ranging

## SPECIFICATIONS

Detector Type	Cooled InSb
Spectral Range	1.5 $\mu\text{m}$ to 5.4 $\mu\text{m}$ (3 to 5 $\mu\text{m}$ optional)
Spatial Resolution	1 280 $\times$ 1 024 pixels
Detector Pitch	10 $\mu\text{m}$
Aperture Size	F/3
Maximum Frame Rate (Full Window)	180 Hz
Maximum Frame Rate (Subwindow)	2 180 Hz @ 64 $\times$ 8
Typical NETD	30 mK
Minimum Exposure Time	0.5 $\mu\text{s}$ to full frame rate
Lens Mount	Bayonet

[sales@telops.com](mailto:sales@telops.com)



[exosens.com](http://exosens.com)

**EXOSENS**  
REVEAL THE INVISIBLE