


COMPACT, INDUSTRIAL  
THERMAL CAMERA

**Xenics**  
EXOSENS GROUP

# Dione 320 OEM Series

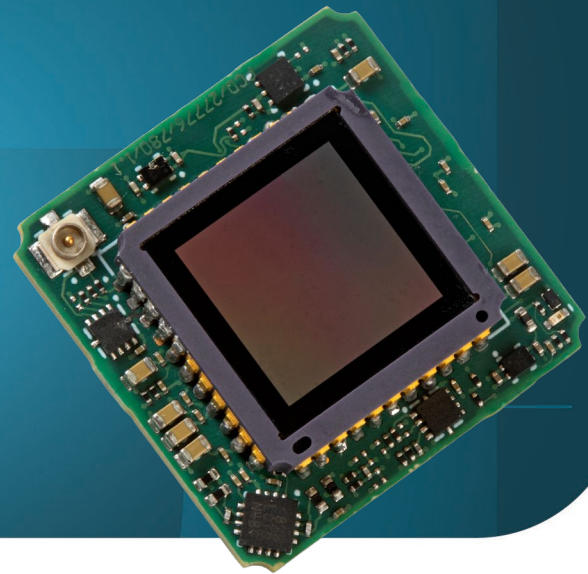

*UNCOOLED THERMAL IMAGING SWaP MODULE*

## KEY FEATURES



**STATE-OF-THE-ART DETECTOR  
WITH 12 µm PIXEL PITCH**



**INDUSTRY LEADING LOW SWaP  
(SIZE, WEIGHT AND POWER)**




**FRAME RATES UP TO 60 Hz**

The Dione 320 OEM is based on a state-of-the-art detector with a 320×240 pixels and 12 µm pixel pitch. The NETD is less than 40 mK (available upon request) or 50 mK.

The cores are optimized for low SWaP (Size, Weight and Power). It utilizes Xenics image enhancement for advanced image processing while keeping power consumption low.

All Dione 320 versions have the same SAMTEC ST5 connector and are GenICam compliant. The compact Dione 320 OEM series find application in industrial machine vision, medical, scientific and advanced research, safety and security systems.

# Dione 320 OEM Series

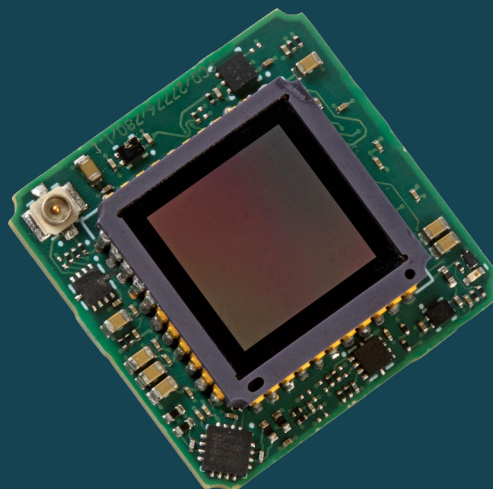

## KEY PERFORMANCES

Image format / Pixel pitch	320 x 240 pixels / 12 $\mu$ m
Integration type	Rolling shutter
Spectral range	8 - 14 $\mu$ m
Max frame rate (full frame)	60 Hz
Power consumption	570 mW (at 60 Hz operation; 16bit DV)
Power supply voltage	DC 5 V

## FUNCTIONS & INTERFACES

Digital output format	16bit DV or MIPI CSI-2
Operating temperature range	From -40°C to +70°C (16bit DV, MIPI-CSI-2)
Storage temperature	From -45°C to +85°C (16bit DV, MIPI-CSI-2)
Detector NETD	<40 mK (at 60 Hz, 300K, F/1), available upon request or <50 mK (at 60 Hz, 300K, F/1)
Shock / Vibration	40 g, 11 ms, MIL-STD810G / 5 g (20 to 2000 Hz), MIL-STD810G

## PRODUCT SELECTOR GUIDE

XEN-000791 (Dione 320 OEM 40 mK)	XEN-000789 (Dione 320 OEM 50 mK)
----------------------------------	----------------------------------

[advancedimaging@exosens.com](mailto:advancedimaging@exosens.com)



[exosens.com](http://exosens.com)

**EXOSENS**  
REVEAL THE INVISIBLE

© Xenics. The information furnished is believed to be accurate and reliable, but is not guaranteed and is subject to change without notice. No liability is assumed by Xenics nor by any Exosens Group companies. Performance data represents typical characteristics as individual product performance may vary. Customers should verify that they have the most current Xenics product information before placing orders. Texts and pictures may not be considered as contractually binding. This document may not be reproduced, in whole or in part, without the prior written consent of Xenics.